DIMENSION NOTES

P-1 DIMENSIONS ARE MEASURED FROM FACE OF STUD TO FACE OF STUD, ONE SIDE ONLY (EXCLUDING SHAFT LOCATIONS). VERIFY EXACT SHAFT SIZES WITH MECH. REQUIREMENTS.

P-2 DIMENSIONS FOR MASONRY (CMU) ARE MEASURED TO FACE OF CMU, HOLD DIMENSIONS AS NOTED AND ADD VARIANCE TO OPPOSITE SIDE.

P-3 VERIFY ALL DIMENSIONS FOR FABRICATED ELEMENTS (TRUSSES, STEEL, ETC.) IN FIELD (AS BUILT) PRIOR TO FABRICATION.

FINISH SCHEDULE

FINISH NUMBER	FLOOR	CEILING	WALLS	BASE	SPECIFIC NOTES
FIN-1	VCT	S.A.T.	PAINTED	4" VINYL	
FIN-2	CARPET	S.A.T.	PAINTED	4" VINYL	
FIN-3	2X2 CT #1	S.A.T.	4X4 C.T. #1 & PAINTED	4" C.T. #1	
FIN-4	RUBBER TREAD	S.A.T./PTD. GYPBD.	PAINTED	4" VINYL	SEE RCP FOR CEILING FINISH
FIN-5	WOOD	S.A.T.	PAINTED	4" VINYL	
FIN-6	SEALED CONC.	PAINTED GYPBD.	PAINTED	NONE	
FIN-7	VCT	S.A.T.	PTD GYPBD & 4X4 C.T. #1	4" TILE	VINYL COATED S.A.T.

WINDOW FINISH NOTES:
1) PROVIDE ALUMINUM CLAD WOOD SILL AT ALL WINDOW UNITS TO MATCH WINDOW FRAME COLOR.
2) ALL EXPOSED TO VIEW WOOD TRIM SHALL BE "STAIN" GRADE, CLEAR RED OAK. STAIN COLOR TO BE SELECTED BY ARCHITECT / OWNER.
3) REFER TO SPECIFICATIONS FOR MANUFACTURER AND ADDITIONAL PRODUCT INFORMATION, FOR ALL FINISHES.
4) WHERE GYPSUM BOARD MEETS STONE, CMU, THE WINDOW FRAME OR OTHER DISSIMILAR MATERIAL, PROVIDE "J" BEAD AND CONTINUOUS SEALANT BEAD.
5) REFER TO SPECS FOR CARPET, CERAMIC TILE (C.T.) & VCT TILE TYPES.
6) REFER TO REFLECTED CEILING PLAN FOR ALL CEILING TYPES & CONFIGURATIONS.
7) PROVIDE TRANSITION STRIPS BETWEEN ALL DISSIMILAR FLOOR MATERIALS. LOCATE STRIPS @ DOOR THRESHOLDS OR OUTSIDE CORNER OF WALLS.
8) WHEN CLOSETS OPEN INTO ROOMS, CLOSET FINISH SHALL MATCH LARGER ROOM.

PARTITION TYPES (REFER TO PARTITION SCHED. SHT. A- 7.0)

1. 5/8" GYPSUM BOARD EACH SIDE OF 3-5/8" STUDS (NON-FIRE RATED & NON - LOAD BEARING).
2. SAME AS 1 BUT W/ 3" SOUND ATTENUATION INSULATION OR BLANKETS BETWEEN STUDS
3. FIRERATED (5/8" F.C.) GYPSUM BOARD EACH SIDE OF 3-5/8" STUDS @ 24" O.C. W/ 3" SOUND ATTENUATION BLANKETS BETWEEN STUDS. ONE HOUR RATED UL DESIGN #U423 (1HR.)
4. 5/8" GYPSUM BOARD OVER 7/8" METAL FURRING STRIPS @ 24" O.C. ON CMU.
5. CAVITY WALL. 5/8" GYPSUM BOARD ONE SIDE OF 2-1/2" METAL STUDS @ 16" O.C. EACH SIDE (MIRROR IMAGE) OF CAVITY SPACE (SEE PLAN FOR WIDTH OF WALL). SEE FINISH SCHEDULE FOR TILE/PAINT APPLICATION.
6. CONCRETE MASONRY UNIT (CMU) WALL ASSEMBLY W/ THICKNESS NOTED BY DIMENSION OR AS SHOWN IN PARENTHESIS.
7. SHAFT WALL ASSEMBLY, SEE SHEET A-7.1

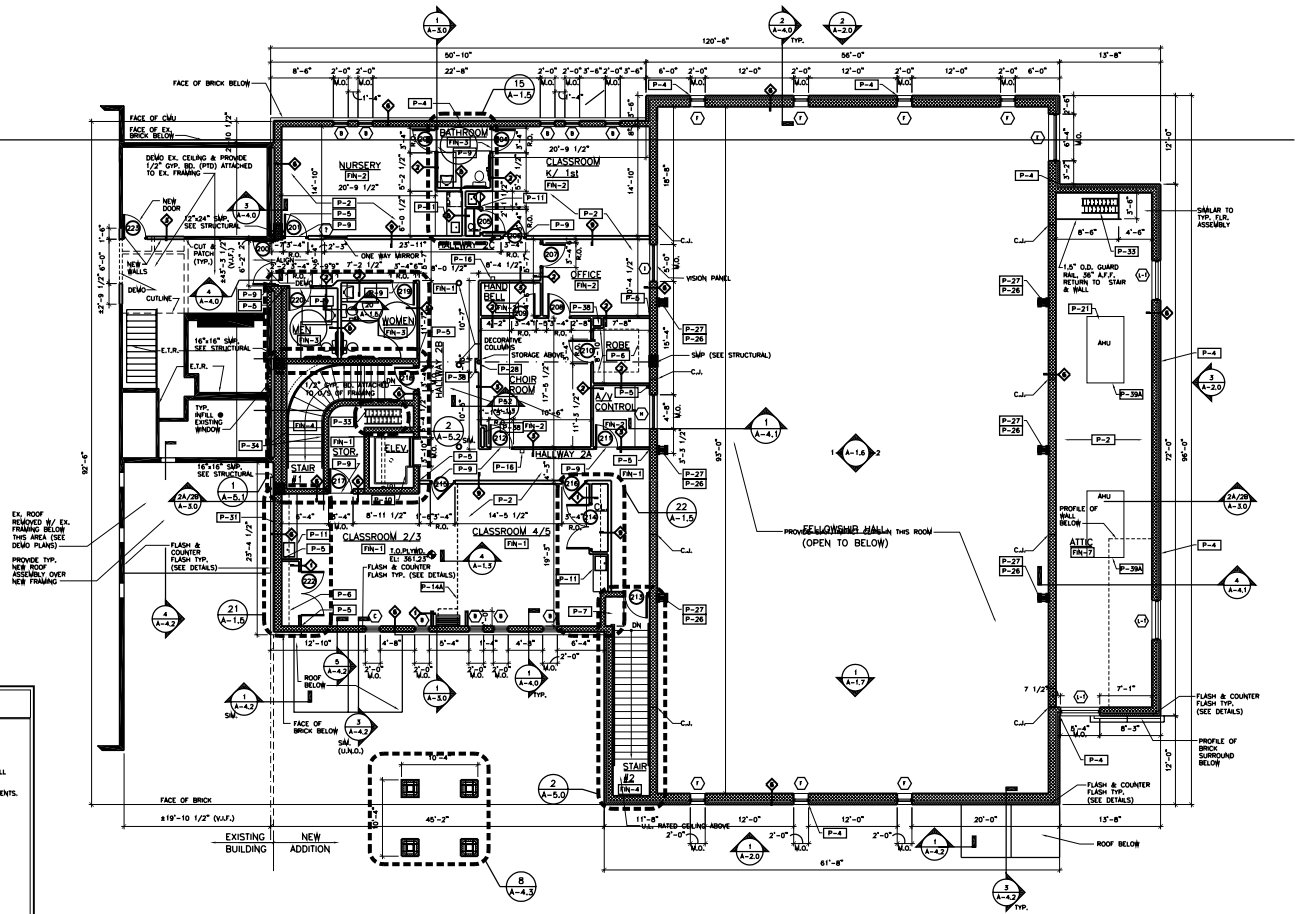

1 A-1.2 UPPER LEVEL FLOOR PLAN
SCALE: 1/8" = 1'-0"

NOTES:
1) VERIFY ALL EXISTING DIMENSIONS & VERTICAL FLOOR TO FLOOR HEIGHTS. ALIGN NEW FLOORS WITH EXISTING.

PLAN KEY NOTES

P-1A 4" CONCRETE SLAB W/ 6X6, W 1.4XW 1.4 WWF OVER 6 MIL VAPOR BARRIER, 4" OF WASHED GRAVEL AND STRUCTURAL FILL. SEAL CONCRETE AT INTERIOR LOCATIONS.

P-1B 4" CONCRETE SLAB (SEE NOTE P-1) WITH BROOM FINISH, SLOPE AT 1/4" PER 1 FT. AWAY FROM DOOR OR BUILDING. PLACE SLAB OVER STRUCTURAL FILL OR VIRGIN SOIL MEETING BEARING REQUIREMENTS.

P-2 ELEVATED FLOOR STRUCTURE SHALL CONSIST OF 2 LAYERS OF OVER 3/4" APA RATED PLYWOOD SUBFLOORING OVER PRE-ENGINEERED FLAT WOOD (OPEN WEB) TRUSSES WITH DOUBLE TOP CHORD. REFER TO WALL SECTION AND STRUCTURAL DRAWINGS FOR DETAILS.

P-3 4" DIA. PERFORMED DRAIN TILE IN GRAVEL BED WRAPPED W/ FILTER FABRIC. SLOPE FOR POSITIVE DRAINAGE & DISCHARGE TO DAYLIGHT. REFER TO DRAWINGS FOR SLOPE DIRECTIONS.

P-4 EXPANSION OR CONTROL JOINT. REFER TO ELEVATIONS

P-5 CONTINUOUS SEALANT BEAD. TYPICAL AT ALL JUNCTIONS BETWEEN DISSIMILAR MATERIALS.

P-6 1 X 12 WOOD SHELF AND COAT ROD (WITH SUPPORTS AT 4' O.C.)

P-7 30 x 48 AREA OF REFUGE

P-8 METAL THRESHOLD AT EXTERIOR DOOR OPENING (TYPICAL AT ALL EXTERIOR OPENINGS)

P-9 TRANSITION STRIP TO TERMINATE ONE FLOOR FINISH AND BEGIN SEPARATE FLOOR FINISH. STRIP MATERIAL TO MATCH HARD SURFACE FINISH (SEE SPECS)

P-10 ADA COMPLIANT HYDRAULIC ELEVATOR (SEE DETAILS & SPECIFICATIONS)

P-11 PLASTIC LAMINATE COUNTERTOP WITH DROP-IN SINK (IF SHOWN). BASE CABINETS & 12" DEEP WALL CABINETS ABOVE. REFER TO INTERIOR ELEVATIONS (SUBMIT SHOP DRAWINGS ON ALL COMPONENTS).

P-12 CONTINUOUS ALUMINUM GUTTER WITH DOWNSPOUTS

P-13 WALL MOUNTED LIGHT ABOVE (SEE ELECTRICAL)

P-14A MOVABLE PARTITION ASSEMBLY (PANEL, DOOR & TRACK) IN CONFIGURATION SHOWN (SEE SPECIFICATIONS)

P-15 FOUNDATION OR BASEMENT WALL OVER CONT. CONC. FOOTING (SEE WALL SECTION & STRUCTURAL DWGS.) PROVIDE 4" VENEER 8" BELOW GRADE.

P-16 PROVIDE WALL MOUNTED FIRE EXTINGUISHER.

P-17 PROVIDE 30" X 48" CLEAR FLOOR SPACE W/ WALL MOUNTED SIGN DESIGNATING AREA AS "AREA OF REFUGE"

P-18 RETAINING WALLS FOR RAMP, STAIR, WELLS OR ELEVATED SIDEWALK.

P-19 PROVIDE DROPPED GYPBD. SOFFIT (5/8" GYPBD. OVER METAL STUDS).

P-20 PROVIDE 4" THICK CONC. HOUSE KEEPING PAD FOR HVAC EQUIPMENT EDGE OF PAD SHALL BE 4" LARGE THAN EQUIP. FOOTPRINT.

P-21 HVAC EQUIPMENT - REFER TO MECH DWGS.

P-22 OWNER TO PROVIDE/INSTALL KITCHEN EQUIPMENT, G.C. TO PROVIDE ALL ELECTRICAL AND PLUMBING ROUGH-IN.

P-23 HVAC SHAFT - REFER TO MECH. DWGS. FOR SIZE & DUCT REQUIREMENTS.

P-24 CONCRETE METAL PAN STAIR ASSEMBLY.

P-25 ASPHALT SHINGLE ROOF ASSEMBLY (SEE SECTIONS).

P-26 GYP. BD. WRAPPED COLUMN - SEE DETAILS

P-27 STEEL BENT - SEE STRUCTURAL DRAWINGS

P-28 STEEL PIPE COLUMN - SEE STRUCTURAL DRAWINGS

P-29 8" X 4" BRICK PAVERS INLAID IN CONCRETE SLAB ON GRADE.

P-30 NOT USED.

P-31 3HR FIRE RATED FIRE WALL.

P-32 ROOF DORMER - SEE DETAILS.

P-33 ALTERNATING TREAD STAIRS (SEE SPECIFICATIONS & SECTIONS)

P-34 CONTINUOUS 1.5" DIAMETER PAINTED STEEL HANDRAIL.

P-35 CONCRETE INSERT FOR VOLLEYBALL STANDARDS.

P-36 PROVIDE 6 PAINTED 1x12 WOOD SHELVES W/ ADJUSTABLE STANDARDS.

P-37 PROVIDE EMPTY A/V CONDUIT, WITH PULL STRING, FULLY CONCEALED IN WALL BELOW SLAB OR IN PLENUM. (ROUTE TO BE DETERMINED BY, G.C.) REFER TO NOTE ON PLANS FOR DIAMETER, ROOM START, AND ROOM TERMINATION.

P-38 GYP. BD. OVER 2X4 WOOD STUDS TO ENCLOSE HVAC DUCT , PIPING, COLUMN, OR PLUMBING CHASE.

P-39A 4" HIGH HOUSE KEEPING CURB CONSISTING OF 2'X4'S @ 16" O.C., DECK. (6" LARGER EA. SIDE OF EQUIP. FOOTPRINT).

P-39B 4" HIGH CONCRETE HOUSE KEEPING PAD. 6" LARGER ON EA. SIDE OF EQUIPMENT FOOTPRINT.

P-40 PROVIDE WALL SUPPORTS FOR DRINKING FOUNTAIN(S)

P-41 PROVIDE CMU INFILL @ EXISTING HOW OPNG. FINISH TO MATCH EXISTING ADJACENT SURFACES.

Robson Group Architects
4601 Singer Court, Suite 270
Chantilly, Virginia 20151
(703) 802 9075

Architecture Planning Interior Design

SEAL:

PROJECT:
Prince of Peace United Methodist Church
Classroom and Fellowship Hall Addition
6299 Token Forest Drive
Manassas, Virginia 20112

ISSUED:
07/19/06 - PROGRESS SET
08/2/06 - PROGRESS SET
03/21/07 - PERMIT SET

REVISIONS:

SHEET/TITLE
UPPER LEVEL FLOOR PLAN

A-1.2

Copyright © 2002 Robson Group Architects, Inc.
This design & drawing(s) are protected under Copyright Law.